



ENCORE L26 + ENCORE L/S 2426
walk-behind scrubber dryer

ALTO[®]
Why
Compromise[™]




ENCORE L26 + L/S 2426

walk behind scrubber-dryer

The tangential three-stage vacuum motor allows for "best in industry" solution collection and longer life.

Easy emptying of recovery and solution tanks with the hose.

Parabolic, break-away squeegee is standard with all ENCORE machines. Picks up all the water even on tight turns, if the squeegee accidentally hits obstacles it will slide off the machine to protect both the machine and the obstacle.

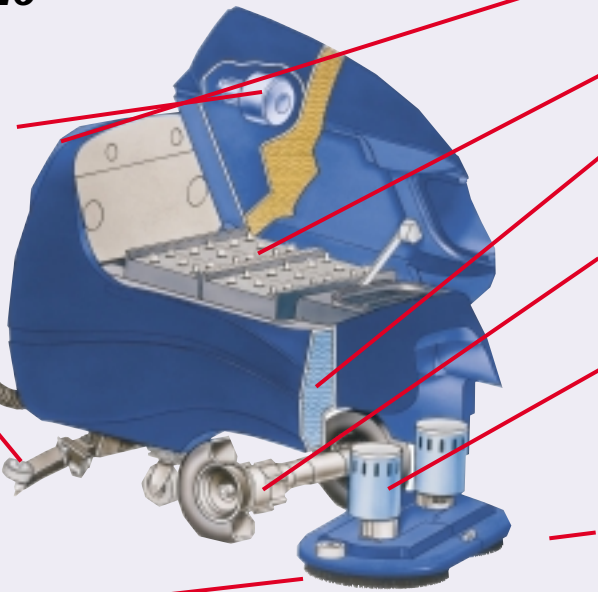

Bristle brush skirts prevent the solution from overspraying and at the same time allow double scrubbing.

Ergonomic handle means that there is no need for adjustment, it is designed so it will suit different operator heights.

Large tanks and battery compartment mean longer running times without re-filling.

Polydur solution/recovery tanks have an eight-year warranty with no rusting or corrosion possible.

One piece transaxle drive system provides smooth forward/reverse traverse for increased manoeuvrability.

Individual brush motors are durable and designed to provide consistent power to the scrubbing brushes or pad drivers. The brush pressure can also be adjusted from the control panel so it fits the application.

Cylindrical scrubbing allows for debris to enter the scrubbing path and collect it in a separate rust proof hopper (wet sweeping) and is proved to be useful when cleaning in e.g. schools, hospitals or sports facilities. (ENCORE L26 only)

TECHNICAL SPECIFICATIONS

		Battery powered		
		ALTO ENCORE L26	ALTO ENCORE S2426	ALTO ENCORE L2426
Cleaning width	mm/In	660 / 26"	660/26" or 610/24"	660/26" or 610/24"
Brush size	mm/In	333 / 2 x 660 mm - Cylindrical	330 / 2 x 13"	330 / 2 x 13"
Squeegee width	mm	970	864	864
Capacity	m ² /h	2640	2640 / 2440	2640 / 2440
Tank capacity, Solution/Recovery	l	76 / 76	76 / 76	76 / 76
Power source	Volt	24	24	24
Brush motor	Power	Watt	2 x 370	1100
	Speed	RPM	1000	200
	Pressure	kg	0 - 45	0 - 68
Vacuum motor	Power	Watt	550	550
	Type		Tangential	Tangential
Traction motor	Power	Watt	370	-
	Type		Transaxle	Brush assist
	Speed	m/min - km/h	0-76 / 0-4.5	-
Dimensions	L x W x H	mm	1422 x 711 x 1092	1422 x 711 x 1092
Weight with batteries without water	kg		319	319

BRUSH HEAD ADJUSTMENT



Brush head adjustment without use of tools. The brush head changes from 610mm to 660 mm which makes it capable to pass through check-out points or narrow doors. (ENCORE 2426)

OPTIONAL ACCESSORIES (see product catalogue for further accessories)



Pads

Available to suit a wide range of floor surfaces and cleaning requirements.



Brushes

Wide variety of brushes available – in various textures to suit all cleaning applications



Detergents

Wide variety of detergents available for the effective removal of all types of dirt and grime.



Off Aisle Spray Tool and Vacuum Wand

To clean inaccessible and difficult to reach areas